


## LED FLAT PANEL

## SERIES E2PL

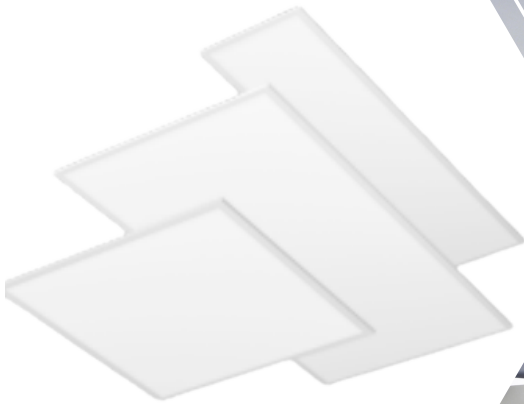

## OVERVIEW

LED flat panel light fixture provides an attractive skylight appearance applications using Light Guide Technology. Standard 2x4 drop ceiling size available to suit any office application and layout. This panel light can be used for office, classroom, conference room, or other general lighting applications, providing light without any of the maintenance issues associated with fluorescent tubes. Installation is quick and simple when mounting into standard drop-in T-grid suspended ceiling systems. Anchor hooks at each corner are also provided for suspended cable mounting as well. Constructed with aluminum framed body and LED lifetime rating of at least 50,000 hours.

## KEY FEATURES

- No UV or IR radiation
- Modern and efficient design
- Mercury-free construction
- Suitable for damp location use
- Standard T-Grid drop ceiling installation
- Dimmable with 0-10v systems
- Suitable for Type IC installation

## APPLICATIONS

- Architectural decor
- Overhead task lighting
- Ambient room lighting
- General lighting

## SPECIFICATIONS

Order Number	65010	65011
Model Number	E2PL2A30D-835	E2PL2A30D-840
Configuration	2x2	2x2
Beam Angle	110°	110°
Lumen Output	3852 LM	3888 LM
Luminous Efficacy	124 LM/W	125 LM/W
Input Power	31 W	31 W
Input Voltage	120-277 Vac	120-277 Vac
Power Factor	0.89	0.89
THD	0.13	0.13
Color Temp (CCT)	3500 K	4000 K
Color Rend (CRI)	84	84
Lifetime Rating	50000 hours	50000 hours
Warranty	5 Years	5 Years
Dimmability	0-10v	0-10v
Operating Temp	14 to 104(°F)	14 to 104(°F)
Environment	Damp Locations	Damp Locations
DLC	TBA	TBA
Safety Cert	UL	UL
Weight	TBA LBS	TBA LBS
Dimensions	23.8" x 23.8" x 2"	23.8" x 23.8" x 2"

MANUFACTURED BY:



1010 Martin Luther King Jr. Pkway.  
 Suite 200  
 Durham, NC 27713  
 www.epoweron.com

Contents are subject to change without notice.