

FEATURES

INTENDED USE

Suitable for Living Room, Hallway, Bedroom, Balcony, Kitchen and Other applications.

CONSTRUCTION

Chrome finish is highly reflective for a mirror-like look that works with any decorating style

OPTICS

UP/DOWN WALL MOUNT LIGHTING - DIY, Install the light with glass shades up or down to light up every corner of your room.

ELECTRICAL

The 3-light vanity fixture is Easy Installation -Wall Installation, Very Easy. the Package Includes Mounting Accessories and Installation Instructions. This Vanity Light Connector is E27 or E26, Suitable for Most Light Bulbs.

INSTALLATION

Quick-connect wiring allows you to pre-wire the light fixture to the junction box for a quicker, easier installation

LISTINGS

ETL certified to be brighter than existing fixtures in your home.

WARRANTY

3-year limited warranty. Complete warranty terms located at: www.epoweron.com

NOTE:

Actual performance may differ as a result of end-user environment and application. All values are design at typical values, measured under laboratory conditions at 25C.Specifications subject to change without notice.

LED LAMP VANITY LIGHT MG01VL005




SPECIFICATIONS

ITEM	Voltage	Watt/Socket	Body Material	Body Finish	Lens Material	Lens Finish	Base	Size	Specialty
MG01VL00500100	120 V	Max 60W	Iron	Brushed Nickel	Glass	Frosted	Medium E26	5"	Glass Cup 1 Head
MG01VL00500200	120 V	Max 60W	Iron	Brushed Nickel	Glass	Frosted	Medium E26	12"	Glass cup 2 Heads
MG01VL00500300	120 V	Max 60W	Iron	Brushed Nickel	Glass	Frosted	Medium E26	19"	Glass cup 3 Heads


DIMENSIONS

ITEM	L	H	W
MG01VL00500100	5"	10"	6"
MG01VL00500200	12"	10"	7"
MG01VL00500300	19"	10"	8"

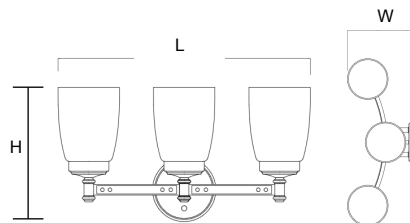


ACCESSARIES


P3 Wire Connector*3

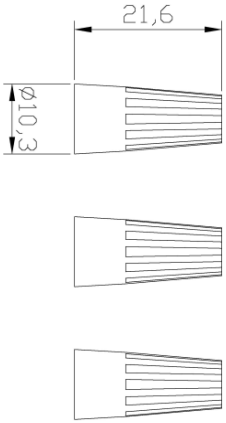


Bracket*1



Screw*2




Screw*2



INSTALLATION STEPS

Step1: Remove the plastic ring from the E26 socket, attach the glass shade and secure it with the plastic ring.

Step2: Drive the mounting screws into the mounting bracket and attach it to the outlet box using two outlet box screws. Connect the wires: Black to Black, White to White, Green to Green. Secure the connection with wire nuts. Carefully tuck all wires back into the outlet box.

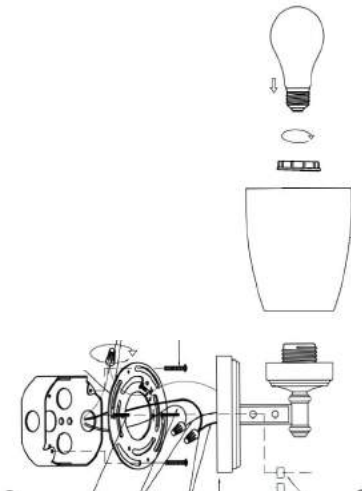

Step3:

Place the fixture on the wall by aligning the protruding mounting screws through the appropriate holes and tighten the fixture to the wall using two decorative nuts. Installation complete

PACKING STRUCTURE

Model Number	Inner pack				Outer pack					Pallet(H 84")	
	Length (in)	Width (in)	Height (in)	Pieces	Width (in)	Length (in)	Height (in)	Pieces	G.W (LBS)	Cases	Pieces
MG01VL00500100	/	/	/	/	7.48	6.69	7.68	1	2.31	360	360
MG01VL00500200	/	/	/	/	12.91	12.80	7.68	1	4.4	120	120
MG01VL00500300	/	/	/	/	19.49	13.98	7.68	1	6.6	60	60